
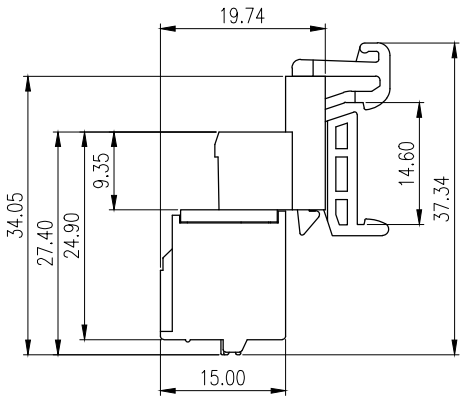
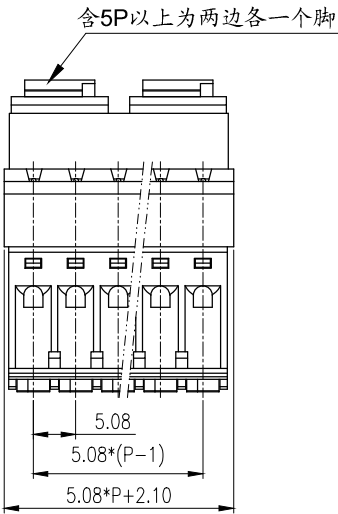



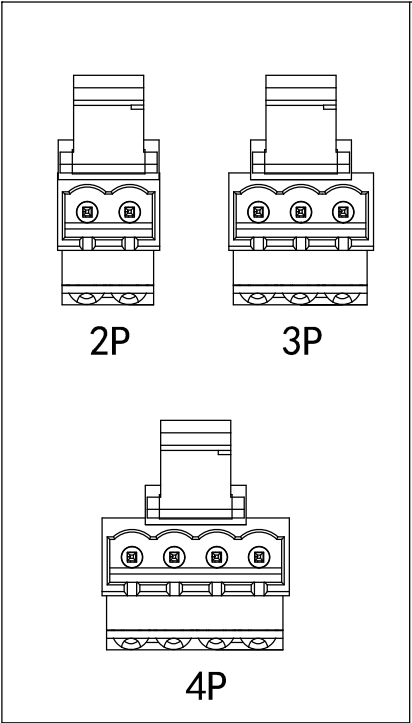

REVISION RECORD			
REV.	CONTENT	MOD.	DATE
0	初版发行		


NOTES1:
UL Standard:
1.Voltage Rating: 300V, Current Rating: 10A

NOTES2:
1.Pitch : 5.08mm
2.Withstand Voltage : AC2500V for 1 minute
3.Using Temperature Range : - 40℃ ~ + 105℃
4.Suitable Electric Wire: 26-12AWG

技术要求1:
UL 标准:
1. 额定电压: 300V, 额定电流: 10A

技术要求2:
1. 间距: 5.08mm
2. 耐电压值: AC2500V/min
3. 使用条件: -40℃~+105℃
4. 适用线规: 26~12AWG

	pitch dimension			Nominal dimension					— /
	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
variable range	to 6	to 10	to 24	to 30	to 60	to 100	to 150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

6	LC15-脚		1067T0Y00AV		1-2	PA66-V0	
5	LC60-5.08五金件		2083B0001AV		P	磷青铜	镀亮锡
4	LC6-5.08-弹片		F2A0DLC658BV		P	不锈钢	
3	LC6-5.08-按钮		1020D0Y01AV		P	POM	
2	LC26U-5.08-盖板		2085A0YXXAV		1	PA66-V0	
1	LC6-5.08-本体		1020A0YXXAV		1	PA66-V0	
NO.	NAME OF PART		NO. OF PART		Q' TY	MATERIAL	NOTES
DES.	CMZ	DATE	2025/03/26	UNITS	MM	THIRD ANGLE PROJECTION	
CHK.		DATE		SIZE	A4		
APP.		DATE		SCALE	1:1	DWG NO.	SP-2-208501
 上海联捷电气有限公司 Shanghai Elinker Electric C O.,LTD						TITLE	
						LC25U-5.08-XXP-1Y-00A	
						LC25U-5.08-成品	