
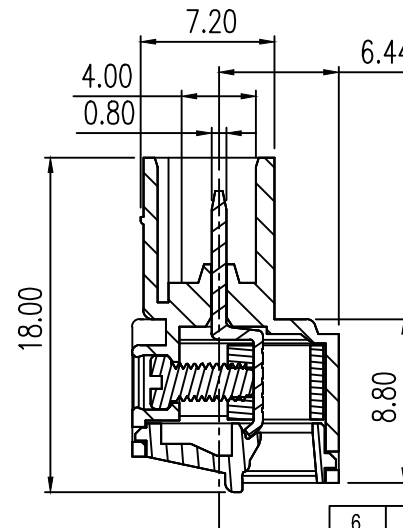
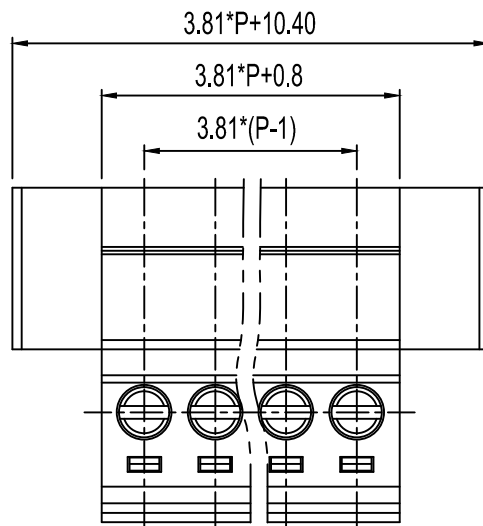


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
△	初版发行		

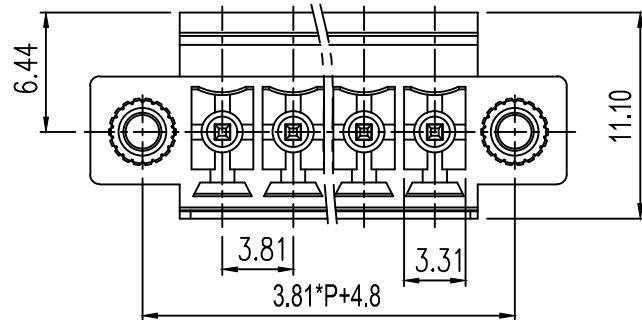

NOTES:

Pitch:3.81mm Pole:2-24P

Rated Voltage:300V

Rated Current:8A

Withstand Voltage:AC2500V for 1 minute

Insulation Resistance 500MΩ/DC500V

Using Temperature Range -40° ^+150°

Wire range :28-16 AWG

Screw Torque Value :0.2N.m

技术要求:

间距: 3.81mm 极数: 2-24P

额定电压: 300V

额定电流: 8A

耐电压值: AC 2500V/min

绝缘阻抗: 500MΩ

使用条件: -40℃--+105℃

适用线规:28-16AWG

螺丝扭矩: 0.2 N.m

	pitch dimension			Naminl dimension					— ▱ ⌒
	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
variable range	to 6	to 10	to 24	to 30	to 60	to 100	to 150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

6	LZ1-耳朵螺母	SNM0250010V	2	黄铜	
5	LC10-3.81方针	1054B0001AV	P	紫铜	镀雾锡
4	LC1-3.81-方块	F1A0BLC3813V	P	黄铜	镀镍
3	LC18-3.81-螺丝	SSM0200030V	P	碳钢	三价铬钝化彩锌
2	LC1-3.81盖板	1002C0YXXAV	1	PA66-V0	
1	LC10M-3.81主体	1054M0YXXAV	1	PA66-V0	
NO.	NAME OF PART	NO. OF PART	QTY	MATERIAL	NOTES
DES.	CMZ	DATE 2026/06/09	UNITS mm	THIRD ANGLE PROJECTION	SHEET
CHK.		DATE	SIZE A4		1 of 1
APP.		DATE	SCALE 1:1	DWG NO.	REV:V0
				TITLE	LC10MG-3.81-XXP-1Y-00A
					LC10MG-3.81成品